

EXPERIENCE INNOVATION WITH NICHROME 



NICHROME

FILPACK SERVO 15K

High Speed Double Head
Mechanical Machine

- Real Time Data Display
- Real Time Fault Detections
- Jumbo Fill Roll Loading
- NDOIT - Nichrome Data Over Internet




Food

Pharma


Non-Food

FILPACK SERVO 15K

Front view

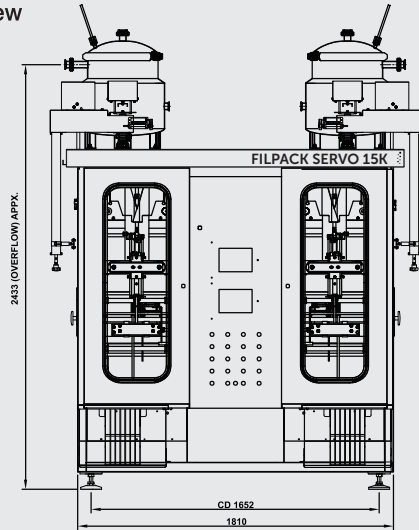

Side view

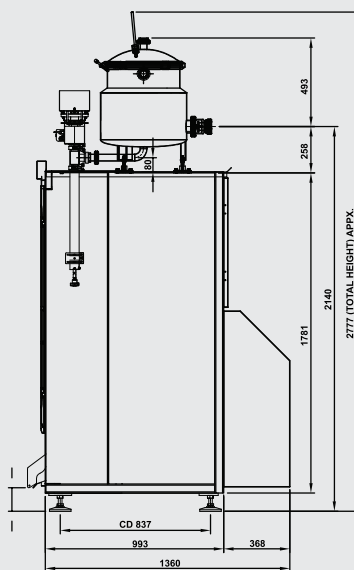

What is FILPACK Series

- Total S.S. Construction of Machine
- No Cooling Water
- No Heating Element
- Sprint: Patented Energy Utilization System
- Design Patented Parts & Assemblies

Salient Features

- All SS Construction Including Structure
- No Compressed Air, No Cooling Water
- Advance Sealing System
- Equipped with Touch Screen HMI & PLC
- Servo Motors For Pouch Film Pulling
- Motorized Film Unwind System
- One Touch Settings Enabled
- Stops Automatically on Fault
- Onscreen Production Report

Technical Specifications

| | |
|---------------------|--|
| Model | FILPACK SERVO - 15K |
| Machine Dimensions | 1810mm(W), 1360mm(D), 2770mm(H) |
| Pack Quantity Range | 200 ml to 1000 ml |
| Accuracy | Lesser than $\pm 0.5 \%$ |
| Packaging Material | LDPE/LLDPE |
| Film Width | 325 +2/-0 mm, Reel Dia: 650 mm Max |
| | Jumbo Roll up to 100 Kg can be loaded |
| Package Style | Center sealed pillow pouch |
| Speed | Up to 15000 pouches/hour for up to 250 ml Pouches |
| | Up to 12000 pouches/hour for up to 500 ml Pouches |
| | Up to 6600 pouches/hour for 1000ml Pouches |
| | *Output & accuracy is dependant upon film and product* |
| Power | 400 V $\pm 1\%$ AC 3 Phase, 50 Hz, 4 Wire (Stabilized) |
| Power Consumption | 1.5 KWH Unit Appx |

Pack Size

| Quantity | Width | Length |
|----------|--------|--------|
| 200 ml | 150 mm | 100 mm |
| 500 ml | 150 mm | 155 mm |
| 1000 ml | 150 mm | 230 mm |

Applications

Plain Milk, Flavored Milk, Tak/Lassi, Drinking Water, Juice


Optional Accessories

- Photomark Scanner
- Date Batch Coder
- Extended Legs
- Tray Stand & Platform

Pouch Format



CSPP 200ml



CSPP 500ml



CSPP 1000ml

